

Product Data Sheet

TAU-M Crash Cushion

Last Updated: May 2025



Containment Level	MASH TL3
Impact Condition	2270 kg pick-up truck, 100km/h
Classification	Non-gating, fully re-directive
System Length	6.93 m
System Height	830 mm
System Width	877 mm
Max. Hazard Width	762 mm
System Mass	1135 kg
System Finish	Hot dip galvanized
Ground Surface	Concrete or Asphalt
Number of Anchors	25 off M20 (concrete), 53 off M20 (asphalt)
Containment Level	MASH TL2
Impact Condition	2270 kg pick-up truck, 70km/h
Classification	Non-gating, fully re-directive
System Length	4.33 m
System Height	830 mm
System Width	877 mm
Max. Hazard Width	762 mm
System Mass	770 kg
System Finish	Hot dip galvanized
Ground Surface	Concrete or Asphalt
Number of Anchors	25 off M20 (concrete), 53 off M20 (asphalt)

Product Data Sheet

TAU-M Crash Cushion

Last Updated: May 2025




Product Data Sheet

TAU-M Crash Cushion


Last Updated: May 2025



MASH TL3 CONFIGUARTION

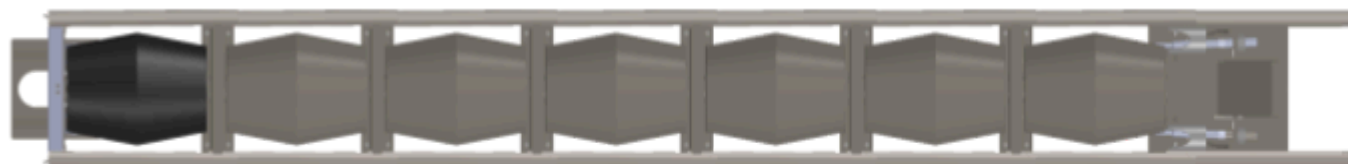


PLAN VIEW

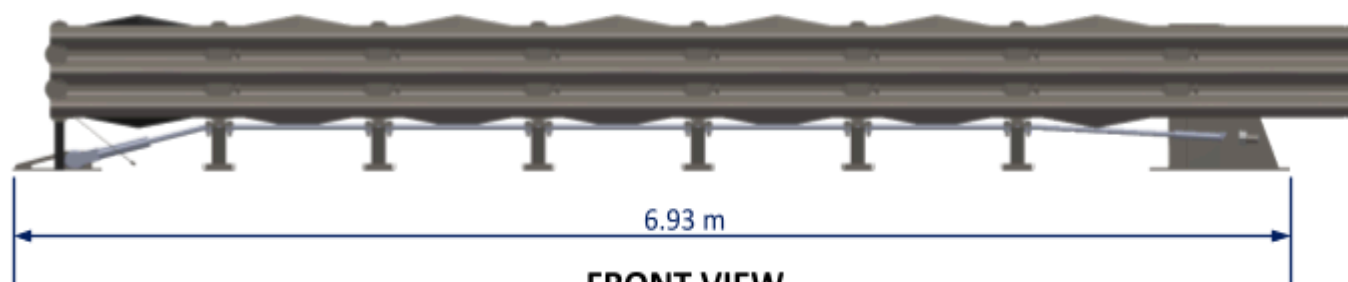


FRONT VIEW


MASH TL2 CONFIGUARTION

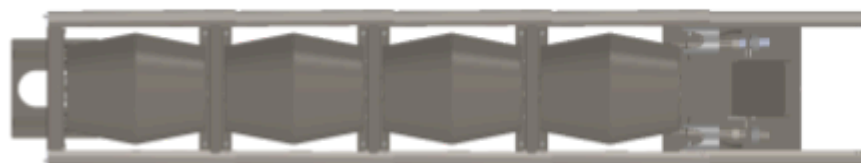

PLAN VIEW

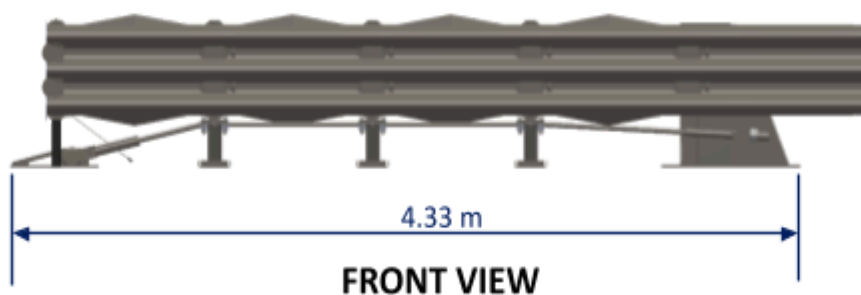

FRONT VIEW

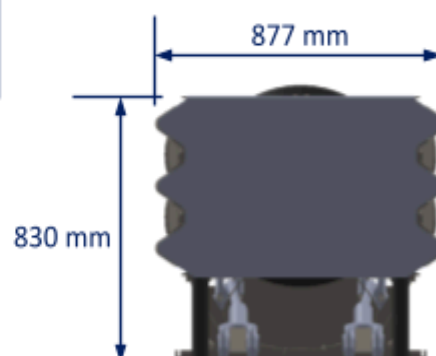

SIDE ELEVATION (TL2 & TL3)